

PRODUCT CODE 5673

Apex Shyne Dust Proof

Asian Paints Apex Shyne Dust Proof Emulsion powered by Nano-Block is tailored to give an impressive sheen to the exterior walls. It is a smooth, water-based, modified acrylic, exterior wall finish with silicon additives. The new Dust Proof Technology resists dust from settling onto the walls.



PRODUCT BENEFITS



Sheen Finish

Apex Shyne Dust Proof provides best in class sheen finish, giving your newly painted home a rich look



Dust Proof Technology

Apex Shyne Dust Proof has been fortified with Dust Proof Technology which helps to keep your homes clean for a long time



Warranty

Apex Shyne Dust Proof comes with a comprehensive 6 year performance warranty* which can be attributed to its best in class film integrity and sustained superior performance in field

* FOR FURTHER DETAILS PLEASE REFER TO THE APEX SHYNE PRODUCT WARRANTY BOOKLET



Weather Guard

Apex Shyne Dust Proof is specially formulated product to withstand/guard the exterior walls from the exterior climatic conditions viz., rain-heat-humidity compared to conventional waterbased exterior paint



Excellent Microbial Resistance

Apex Shyne Dust Proof provides excellent resistance to microbial attack by retarding the growth of algae and fungi on the walls. This prevents appearance of black spots on walls



WATER BASED

asianpaints
LEAD FREE GUARANTEE

* All Asian Paints products conform to additional Lead, Mercury, Chromium & Cadmium limits from April 2012

Apex Shyne Dust Proof gives an unmatched sheen finish and is powered by Nano-Block technology. It is designed to effectively prevent micro-dust particles from settling on walls. This advanced feature enhances its Dust-Proof capability, ensuring long-lasting cleanliness and durability.

PRODUCT FEATURES

SHEEN



✓ BEST IN CLASS*


HIGH

MEDIUM

LOW

*In comparison to Ace


DRYING TIME TO RECOAT



30
MINUTES


COLOURS AVAILABLE

1500+*



*Currently available in more than 1500 shades as per the Asian Paints Colour Spectra.

AVAILABLE PACKS

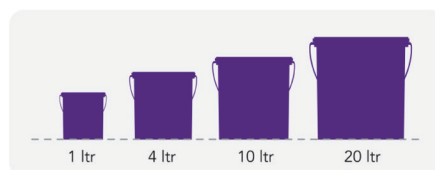

Shelf life: 3 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.

COVERAGE

On normal masonry surface by brushing




2 COATS
55 - 65 sq.ft./ltr**

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

HOW TO APPLY

PRE PAINTING STEPS



PLASTER New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



CLEANING Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. When the underlying surface exhibits chalkiness, in spite of thorough surface cleaning, use Asian Paints SmartCare Primero.



FILLING FOR CRACKS For filling cracks upto 3mm use Asian Paints SmartCare Crack Seal.



FILLING FOR HOLES & DENTS In case of dents and holes use Asian Paints TruCare Wall Putty or a mix of white cement and fine sand in the ratio 1:3.

For exterior surfaces or substrates that are subjected to continuous seepage or dampness, kindly use Asian Paints SmartCare DampProof, before the top coat application.

PAINT APPLICATION PROCESS

| APPLICATION | PRODUCT CODE | THINNER | DILUTION % (BY VOLUME) | APPLICATION ¹ VISCOSITY (SEC) | RECOATING PERIOD ² (HOURS) |
|---|--------------|---------|--|--|---------------------------------------|
| STEP 1 ASIAN PAINTS TRUCARE WALL PUTTY (OPTIONAL) | 0079 | WATER | BASED ON REQUIREMENT TO FORM PASTE | PASTE FORM | 4 HRS |
| STEP 2 ASIAN PAINTS TRUCARE EXTERIOR WALL PRIMER BRUSH / ROLLER / SPRAY | 0065 | WATER | BRUSH 90 - 110 ROLLER 90 - 110 SPRAY 40 - 45 | BRUSH 15 - 18 SPRAY 33 | 4 HRS |
| HORIZONTAL SURFACES LIKE TOP OF WINDOWS, LEDGES SHOULD BE PAINTED WITH 3 COATS OF APEX SHYNE FOR GREATER PROTECTION | | | | | |
| APPLICATION OF PRIMER IS MANDATORY | | | | | |
| STEP 3 FIRST COAT ASIAN PAINTS APEX SHYNE DUST PROOF BRUSH / ROLLER / SPRAY | 5673 | WATER | BRUSH 40 ROLLER 40 SPRAY 40 | BRUSH 35 - 45 SPRAY 35 - 45 | 4 - 6 HRS |
| STEP 4 SECOND COAT ASIAN PAINTS APEX SHYNE DUST PROOF BRUSH / ROLLER / SPRAY | 5673 | WATER | BRUSH 40 ROLLER 40 SPRAY 40 | BRUSH 35 - 45 SPRAY 35 - 45 | 4 - 6 HRS |

1. As measured through a Ford cup. 2. Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions. 3. Some shades may require 3 coats for proper hiding.


HOW TO CHOOSE COLOURS

Browse through Asian Paints colour tools to help you find the right colour combination

COLOUR COSMOS FAN DECK*



BOOK OF COLOURS
(FOR EXTERIORS)



ACE AND APEX SHADE CARD



These shades are for reference only. Please refer to cosmos for correct shade reference.

ADDITIONAL INFORMATION

VOC CONTENT



**LOW VOC
CONTENT**

Asian Paints Apex Shyne Dust Proof meets the LEEDS VOC criteria as per Indian Green Building Council version 1.0 as tested at Shriram Institute for Industrial Research. Tested for Apex Shyne Dust Proof White (shade code 0908).

POST PAINTING CARE

For the best performance of the paint, ensure proper washing of the painting surface and cleaning of all algal and fungal growth, if any, at regular intervals of six months. For any further information, please visit www.asianpaints.com/ultimacare

TECHNICAL DETAILS

- Drying time** : Surface dry time 30 min
- Sheen levels** : 8 - 12 at 60 ° GH
(for white shade)
- Flash point** IS101/1987 Part 1, Sec 6 : NA
- Stability of thinned paint** : To be used within 24 hours

PRECAUTIONS

- > Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hours of application.
- > Do not over-thin or over-extend the brush.
- > Tint using Asian Paints machine colourants only.
- > Stir well and strain before use.
- > Tinted paints need thorough shaking immediately after tinter addition as well as before use. For extremely rough surface including textures: Application by brush is recommended to ensure all the grooves are covered well.
- > Paint will not cover existing cracks, proper care to be taken to ensure the cracks are filled first and then topcoat is applied.
- > For surfaces having heavy algal infestation, proper cleaning followed by application of BIO BLOCK is mandated.
- > Primer coat or only one coat of topcoat should not be kept exposed in monsoon. Complete application before monsoon to be ensured.
- > Specially in pre-monsoon season, horizontal surface to be coated first and then vertical. This will help reduce the streak marks of algal growth if any.
- > For best performance ensure that the surface is dry. On moisture meter it should be under the green zone. In case it is in Red zone, find out the source of water and address it before painting.
- > pH of wall to be below 12, if higher use of Smart Care Primero recommended.
- > Thinned paint should be consumed within 24 hours of dilution. Accordingly it is recommended to thin down only necessary amount of paint. Post 24 hours thinned paint may be susceptible for microbial attack.
- > Ensure not to use Chlorinated water for dilution.

SAFETY FEATURES

- > Kindly refer to the MSDS for Asian Paints Apex Shyne Dust Proof which gives detailed information on safety measures while handling the paint, which is available on request.
- > Store the container with the lid tightly closed in an upright position, in a cool, dry place
- > Keep out of reach of children and away from eatables.
- > May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- > Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- > In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- > Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- > Do not pour leftover paint down the drain or in water courses.
- > In the event of spills, contain spillage using sand or earth.
- > No added Lead, Mercury or Chromium compounds.
- > Left-Over Paint Disposal: Left-over paint/drums should not be disposed in soil/drains. Consumers should consult a local recycling agency for proper disposal of paint/drums.