



asianpaints



ACE
POWER+

GHAR KI SHAAN KA POWERFUL PROTECTOR

Advanced Anti Fade Technology wala Ace Power+,
jo tez dhoop me bhi fika na pade.




2X
COLOUR
RETENTION

ACE POWER+




PASTEL SHADES




Cream Pie

L152




Crystal Peak

L105




Rain Drop

L143




Sugared Nut

L126




Pure Ivory

L124



Cotton Wool

L104



Cream

307




Cold Coffee

L129



Bonewhite

964



Apricot Illusion

7979




Sunset Cloud

7976




Sun-n-sand

7984



Pink Flamingo

8059



Nursery Pink

8058



Pink Linen

8056



Asmani-N

9688



Light Sky

7331



Splash

7345

MEDIUM SHADES



Creme Anglaise-N 9887



Maize Stalk 7903



Light Ochre 7926



Stony Brook-N K144



Steel Gleam 8343



Raw Steel 8313



Pink Candy 8063



Jaipur Dreams 8047



Mohican Trail 8670



Apricot-N 501



Light Biscuit-N 318



Brown Sugar 8582



Batik Green 7678



Little Creek 7606



Pine-N 757



Blue Curacao 7360



Firmament 7343



Citadel 7406

DARK SHADES



Dal Lake Blue-N 9666



Sylvan Lake-N 9708



Blue Ripple-N 9673



Madras Green-I X184



Chrome Green X160



Sawan-I X175



Shiraz-N K018



Fuchsia Fever-N K020



Magenta Rush-N K007



Lalbaug-I X200



Burgundy Plus X129



Milan Red 8101



Brown Bread 9526




Marooned Brown 8669



Moroccan Rose-N 9994

ULTRA WHITE

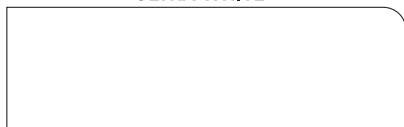

Ultra White

0678

Visualize shades on your walls with



Colour with
Asian Paints
App



Scan to Download
on Android or iOS

DIRECTIONS FOR USE

GET STARTED WITH YOUR PAINTING



CLEANING



FILLING
CRACKS



PUTTY



PRIMER



TOP COAT

SURFACE PREPARATION



Ensure that the surface to be painted is free from any loose paint, dust or grease. Growth of fungus, algae or moss should be removed by wire brushing and water.

SURFACE SMOOTHENING/CRACK FILLING



Asian Paints TruCare Wall Putty is recommended to level minor undulations and smoothen the wall surface. Asian Paints SmartCare Crack Seal is recommended for cracks up to 3mm in width.



PRIMER COAT



Before application of the topcoat, it is necessary to apply a coat of an exterior durable primer for better adhesion and to increase the durability of the paint. For fresh surfaces, we recommend Asian Paints SmartCare Primero. For re-painting, you can alternatively use Asian Paints TruCare Exterior Wall Primer.



TOPCOAT



Apply 2-3 coats of Asian Paints Ace Power+ by diluting 1 litre with maximum of 400mL water.



For best finish, use Asian Paints Trucare Roller 800 or Asian Paints Trucare Roller 580+

Dealer Stamp