

PRODUCT CODE 1B03

Shade Code : Matt - O883 | Sheen - O884

## Apex Ultima Allura Clara

Apex Ultima Allura Clara is a uniquely formulated water based pure acrylic clear coating, designed to provide protection of Allura Concordia, Reserva and Meraki. It is designed to protect the undercoat/substrate from harsh external weather conditions.

### PRODUCT BENEFITS

#### High Water Resistance

Apex Ultima Allura Clara has high water resistance which helps in maintaining the natural look of the substrate.

#### Matt & Glossy Variants

In the Matt variant, the translucent film ensures that the natural look of the textured surface is maintained whereas the Glossy variant gives a rich shiny appearance to the textured surface



#### Anti-Algal Property

Apex Ultima Allura Clara provides superior resistance against fungal and algal.

#### Long Lasting

Asian Paints Apex Ultima Allura Clara incorporates the latest state of the art technology to provide long lasting performance in the most tropical and harsh conditions.



WATER BASED



\* All Asian Paints products contain no added Lead, Mercury, Arsenic or Chromium from April 2008.

### PRODUCT FEATURES

#### DURABILITY



✓ BEST IN CLASS\*

HIGH

MEDIUM

LOW

\*Based on lab (QUV) and field results.

#### FINISH



Refer to sheen levels in technical details.

#### COVERAGE


On normal masonry surface by brushing



**2 COATS**  
45-50sqft/L\*\*

\*\*Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

#### AVAILABLE PACKS

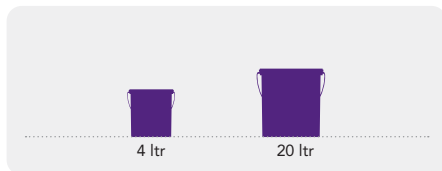

Shelf life: 2 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.

### HOW TO APPLY


#### PRE PAINTING STEPS



**PLASTER** New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



**CLEANING** Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. In case of areas having excessive dampness use Asian Paints DampBlock to limit further dampness. When the underlying surface exhibits chalkiness, in spite of thorough surface cleaning, use Asian Paints Exterior Sealer.



**FILLING FOR CRACKS** For filling cracks upto 3mm use Asian Paints Crack Seal.



**FILLING FOR HOLES & DENTS** In case of dents and holes use Asian Paints Wall Putty or white cement and fine sand in the ratio 1:3

**Apex Ultima Allura Clara should not be applied on surfaces / substrates that are subjected to continuous seepage or dampness.**

#### PAINT APPLICATION PROCESS

APPLICATION	PRODUCT CODE	THINNER	DILUTION % (BY VOLUME)	APPLICATION <sup>1</sup> VISCOSITY (SEC)	RECOATING PERIOD <sup>2</sup> (HOURS)
STEP 1 FIRST COAT ASIAN PAINTS APEX ULTIMA ALLURA CLARA BRUSH / SPRAY	1B03	WATER	30%	25 - 50 SECONDS	4 - 6 HRS
STEP 2 SECOND COAT ASIAN PAINTS APEX ULTIMA ALLURA CLARA BRUSH / SPRAY	1B03	WATER	30%	25 - 50 SECONDS	4 - 6 HRS

1. As measured through a Ford cup.

2. Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions.

3. For best results, it is advisable to apply Apex Ultima Allura Clara on both sides of a roof tile individually before laying.

## ADDITIONAL INFORMATION

### POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

### TECHNICAL DETAILS

**a. Drying time:** Surface dry - 30 minutes

**b. Flash point IS101/1987 Part 1, Sec 6:** NA

**c. Stability of thinned paint:** To be used within 24 hours

### PRECAUTIONS

- › Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hours of application.
- › Do not over-thin or over-extend the brush.
- › Tint using Asian Paints machine colourants only.
- › Stir well and strain before use.
- › Tinted paints need thorough shaking immediately after tinter addition as well as before use.
- › No roller application.
- › Whitish appearance may appear during rainy season, but the same will fade away post regular exposure to sun light and reduced humidity.

### SAFETY FEATURES

- › Kindly refer to the MSDS for Asian Paints Apex Ultima Allura Clara which gives detailed information on safety measures while handling the paint, which is available on request.
- › Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- › Keep out of reach of children and away from eatables.
- › May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- › Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- › In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- › Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- › Do not pour leftover paint down the drain or in water courses.
- › In the event of spills, contain spillage using sand or earth.
- › No added Lead, Mercury or Chromium compounds.
- › Left-Over Paint Disposal: Left-over paint/drums should not be disposed in soil/drains.
- › Consumers should consult a local recycling agency for proper disposal of paint/drums.